

12V-26Ah


ener safe
A brand of **legrand**

Specification



Cells Per Unit	6
Voltage Per Unit	12
Capacity	104W @ 15min- rate to 1.67V per cell @25
Weight	Approx. 8.60 Kg (Tolerance $\pm 4.0\%$)
Internal Resistance	Approx. 8m Ω
Terminal	F13 (M5)
Max. Discharge Current	260A (5 sec)
Short Circuit Current	980A
Design Life	Could Reach 8 years
Max. Charging Current	7.8 A
Reference Capacity	C10 24.5AH C20 26.0AH
Standby Use Voltage	13.7 V ~ 13.9 V @ 25°C Temperature Compensation: -3mV/ / Cell
Equalization Voltage	14 V~14.8 V @25 °C Temperature Compensation: -4mV/ / Cell
Operating Temperature Range	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
Normal Operating Temperature Range	25°C $\pm 5^\circ\text{C}$
Self Discharge	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 3% at 25°C. Please charge batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.



The HR (High Rate) series Valve Regulated Lead Acid (VRLA) battery is designed for heavy load discharge applications with 8 years design life in float service. By using strong grids and specially designed active material the HR series is with lower I.R, lower self discharge rate, high power, and longer service life performance. Generally the HR series offers 30% more power output than the standard range. Suitable for high power standby and cycling situation, such as UPS, datacenter,

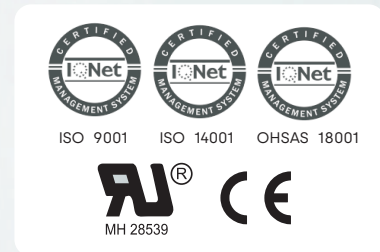

Dimensions

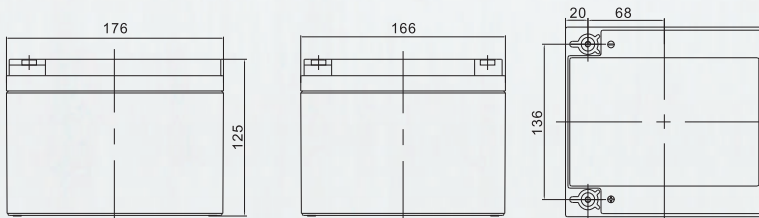

Length	166±1mm (6.54 inches)
Width	176±1mm (6.93 inches)
Height	125±1mm (4.92 inches)
Total Height	125±1mm (4.92 inches)
Terminal	Value
M5	6~7 N*m
M6	8~10 N*m
M8	10~12 N*m

Unit: mm

Constan Current Discharge Characteristics: A (25°C)


F.V/Time	3MIN	5MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
1.60V	119.5	103.9	86.40	76.23	58.93	47.70	34.92	20.36	14.84
1.67V	110.6	96.16	81.05	71.52	55.86	44.49	33.29	19.41	14.13
1.70V	106.0	92.16	78.20	68.94	54.13	42.79	32.35	18.85	13.70
1.75V	100.1	87.04	74.29	64.73	51.60	41.62	31.44	18.54	13.40
1.80V	94.15	81.87	70.38	60.50	49.01	40.39	30.47	18.17	13.07
1.85V	87.86	76.40	66.17	56.09	46.22	38.98	29.35	17.74	12.68

Constan Power Discharge Characteristics: WPC (25°C)


F.V/Time	3MIN	5MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
1.60V	216	188	159	141	110	87.7	64.3	37.7	27.6
1.67V	202	176	150	134	105	82.6	61.9	36.2	26.5
1.70V	196	171	147	130	103	80.4	60.9	35.6	26.0
1.75V	188	163	141	124	99.3	79.1	59.9	35.5	25.7
1.80V	179	156	136	117	95.7	77.9	58.9	35.3	25.5
1.85V	170	148	130	111	92.1	76.7	57.9	35.1	25.2

(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.


Discharge Characteristics Curve

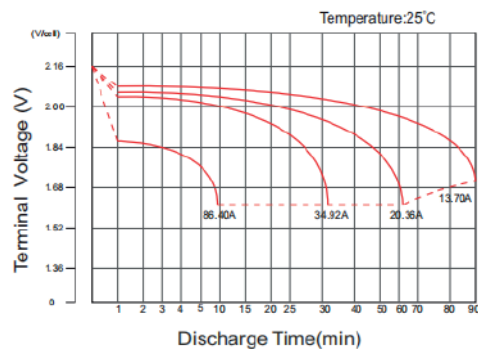


Charge Characteristic Curve For Standby Use

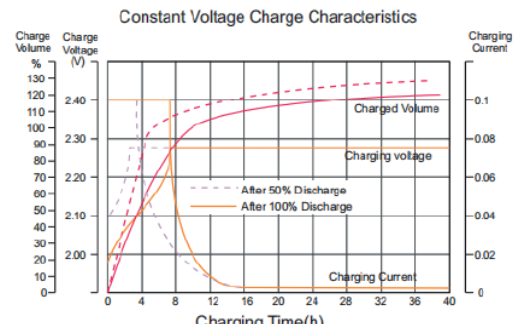


Cycle Life In Relation To Depth Of Discharge

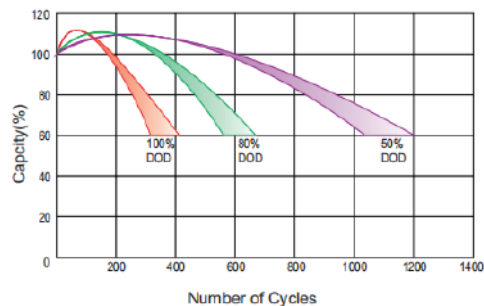


Relationship Between Charging Voltage And Temperature

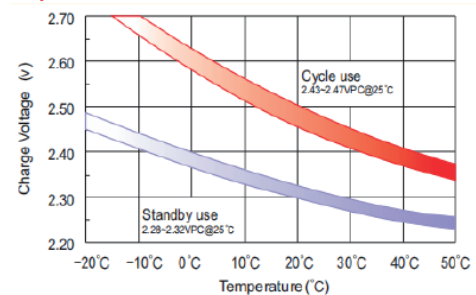


Temperature Effects On Capacity

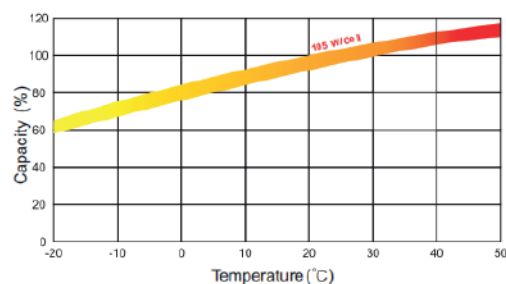


Storage Characteristics

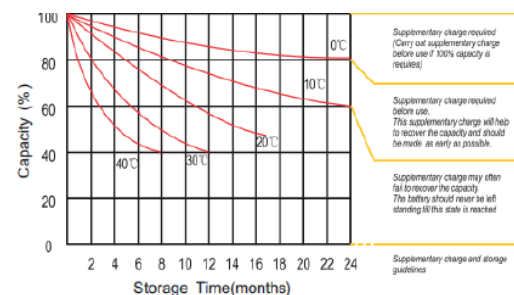

Effect Of Temperature On Long Term Life

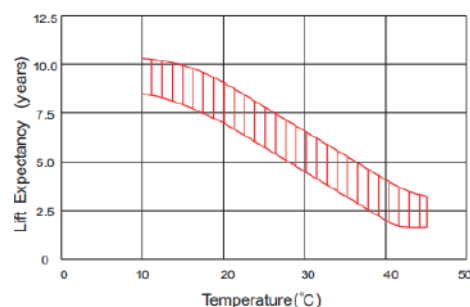

Life Characteristics Of Standby Use

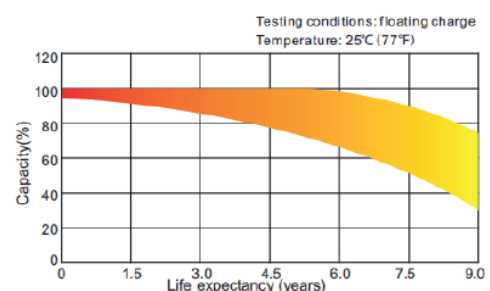

(Note) All above information shall be changed without prior notice, Ritar reserves the right to explain the latest information